





Ball Mount 3 Bike Carrier FGAT1100-1 Instructions

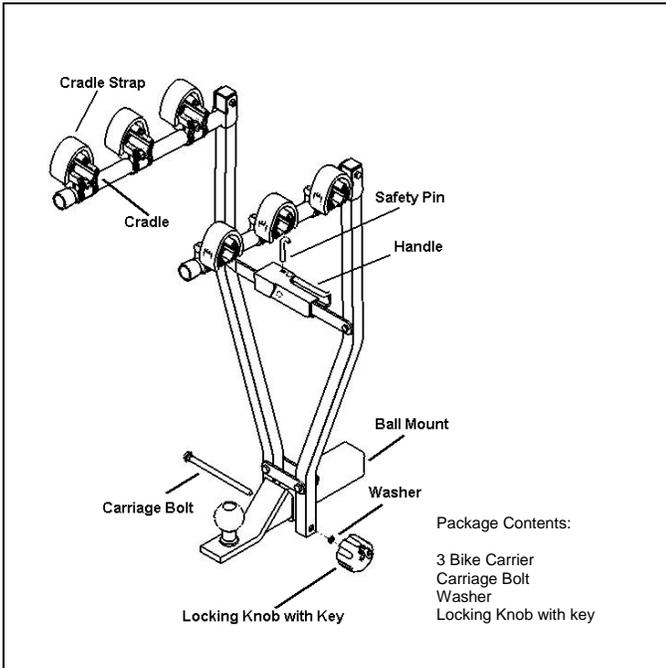


1B. Mounting the Bike Carrier on Ball Mount

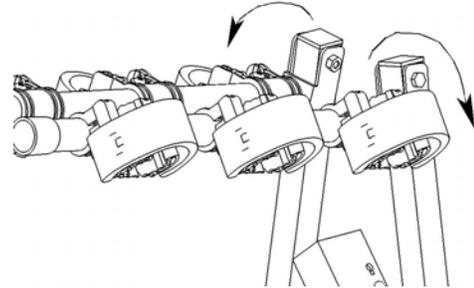


Rotate the saddles as shown.

1C. Mounting the Bike Carrier on Ball Mount




Remove safety pin, squeeze handle and bring uprights together.

1D. Mounting the Bike Carrier on Ball Mount




Position the clamp jaws over the ball mount.

Note: Spacing Guideline




Ball mount must be inserted into receiver and have a minimum of 2 -1/2 inches from the rear of the vehicle to the ball mount drop.

1A. Mounting the Bike Carrier on Ball Mount

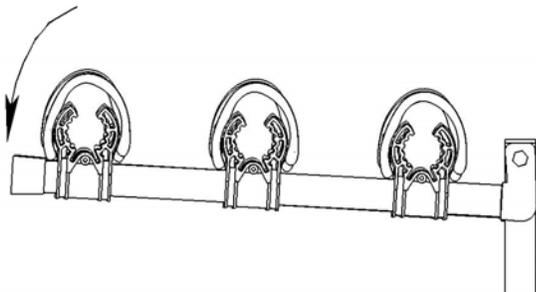

Fold the arms out to the 90° stopped position as shown above.

1E. Mounting the Bike Carrier on Ball Mount

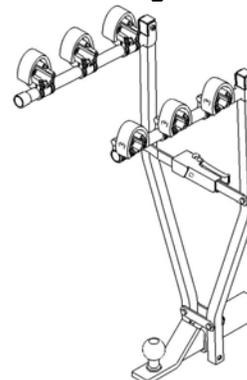


Squeeze handle and push down on center of handle until handle locks into place.

Reinstall the safety pin in the handle.

Rotate the saddles back to the upright position.

2. Installing the theft deterrent locking knob



Slide the carriage bolt through the square cutouts beneath the clamp jaws. Place the washer onto the carriage bolt and screw the locking knob onto the carriage bolt.

Firmly tighten the locking knob by turning clockwise until tight. Rotate the key 180° and remove.

Test the locking knob by attempting to loosen the knob by turning in a counter-clockwise direction. If knob spins and does not loosen, the knob is functioning properly. If the knob loosens, reinsert the key and turn 180°. Tightening the knob. Repeat locking test.

3. Placing Bikes on Bike Carrier

Release the saddle straps by pulling on the end and removing from the hook of the saddle.

Adjust the saddles to best fit the bike. Tighten the saddles with a Philips screwdriver. Place the bike into the saddles and secure by reattaching the saddle straps.

Suggestions:

When placing multiple bikes onto the carrier, alternate the bikes so handle bars and pedals do not contact each other.

To minimize movement during transport, secure the bike frames and wheels with elastic cords.

Remove valuable gear from bike if unattended and use a lock to deter theft of your bike(s).

4. Removing the Bike Carrier from the Ball Mount

Insert the key into locking knob and turn it 180°. Rotate the knob counter-clockwise until it comes off the carriage bolt. Remove washer and carriage bolt.

Rotate the saddles as shown in step 1B.

Remove the safety pin from the handle, squeeze the handle and pull up. The uprights will come together. Remove from ball mount.

Place the carriage bolt through one of the square cutouts and fasten the washer and locking knob onto the carriage bolt. Fold the bike arms up and over for storage.

PRORAC GUIDELINES

Please review the instructions and warranty carefully. Assembly and installation are the purchaser's responsibility and beyond ProRac's control. Therefore, ProRac exclusively limits its warranty to the repair or replacement of a defective ProRac product for up to three years from retail purchase. Warranty excludes damage to your vehicle, cargo, or any person or property during assembly, installation, and use.

- ◆ Make sure all knobs, bolts, screws, straps, and locks are firmly attached, tightened, and locked before every trip. All fasteners must be periodically inspected for signs of wear, corrosion, and fatigue. Check your load at stops during long trips to ensure continued fastening security.
- ◆ Check all local and state laws governing projection of objects beyond the width and length of vehicle. Be aware of the width and height of your cargo since low-clearance branches, bridges, and parking garages can affect the load. Never drive with any lock, knob, or rack in an open or unlocked position. All long loads such as, but not limited to, sailboards, surfboards, kayaks, canoes, and lumber must be tied down front and rear to the bumpers or tow hooks of the vehicle.
- ◆ Remove your rack and accessories when they are not in use and before entering automatic car washes.
- ◆ All locks must be turned and moved periodically to ensure smooth operation. Use graphite or similar dry lubricant. Locks are designed to deter vandalism and theft. Remove valuable gear if your vehicle is unattended. Replacement keys are available only through your ProRac dealer.
- ◆ All cargo will affect the vehicle's driving behavior. For your safety, adapt your speed to the conditions of the road and load being carried. Obey all posted speed limits and traffic cautions.
- ◆ Due to their wind resistance, do not carry disks or wheels with covers on the ProRac bike carrier.
- ◆ Consult your ProRac dealer if you have questions regarding the operation and limits of ProRac products. Review all instructions and warranty information carefully.