




Wheel Holder Installation Instructions

Package Contents:

- (2) Wheel Holders
- (2) Backing Plates
- (2) 1/4-20 x 3/4 Button Head Screws
- (2) 1/4 Split Lock Washers
- (2) 1/4 Flat Washers
- (1) Hex Key


1.

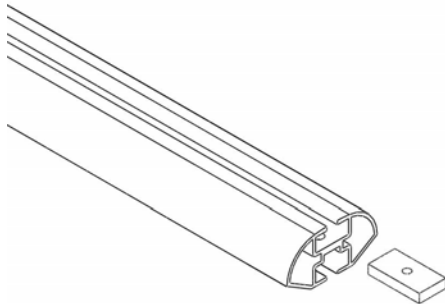

Remove the end cap from the load bar by loosening the narrow shoulder hex screw.

Slide the backing plate into the top 'T' channel of the load bar.


2.

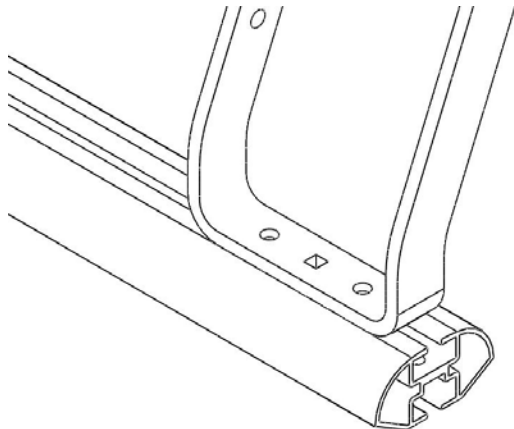

Align the round tabs on the bottom of the wheel holder so that they rest in the top slot of the load bar.

Position the wheel holder so that the square opening of the wheel holder is centered above the bolt hole of the backing plate.

3.

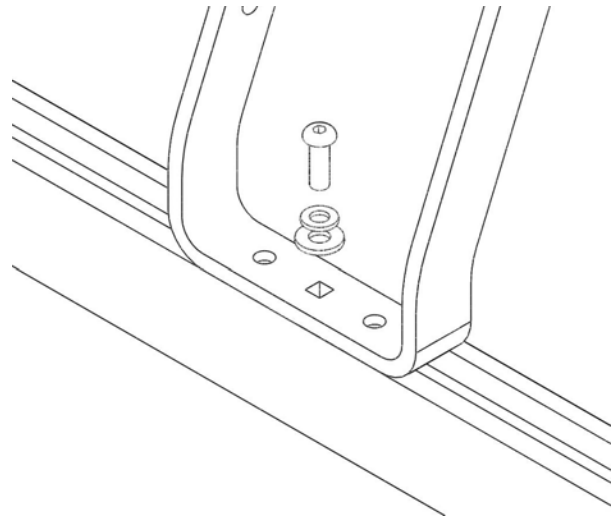


Place the flat washer on top surface of the wheel holder.

Place the split lock washer on top of the flat washer.

Insert the button head screw through both washers and into the backing plate.

4.

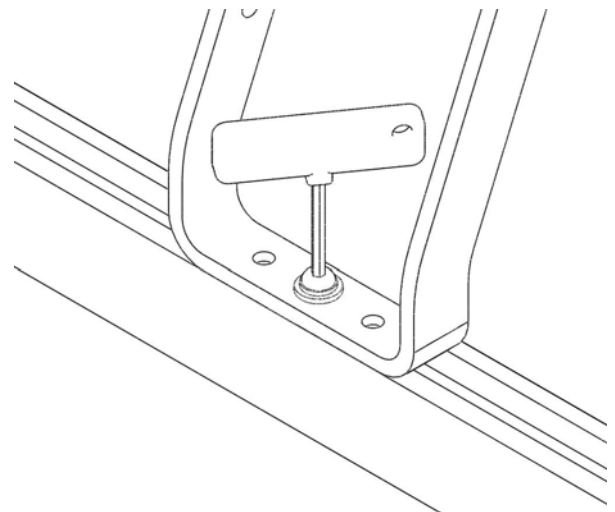

Loosely tighten the button head screw with the hex key.


Slide the wheel holder to the desired position.

Tighten the button head screw with the hex key securely.

Reinstall the end cap.

Place the hex key in vehicle glove box for future use.

4.

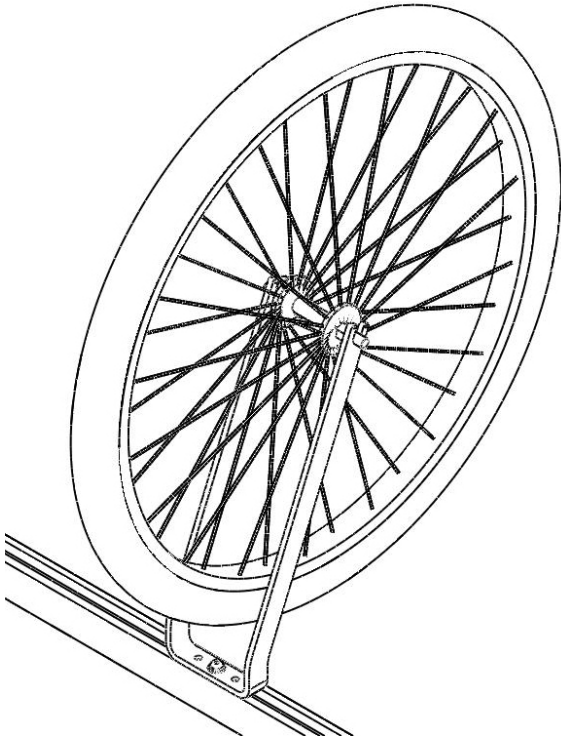

Set your tire into the notch at the top of the wheel holder.

Due to wind resistance, do not carry discs or wheels with covers.

Secure the wheel to the wheel holder with skewer, follow bike manufactures recommendations.

5.

If sliding front tent trailer bed out, wheel holder will need to be removed.

Check your installation. Be certain:

The entire system including the attachment of load bars to vehicle is stable and secure.

Make sure all knobs, bolts, screws, straps, and locks are firmly attached, tightened, and locked before every trip. All fasteners must be periodically inspected for signs of wear, corrosion, and fatigue.

Check your wheel holder at stops during long trips to ensure continued fastening security.

PRO RAC GUIDELINES

Please review the instructions and warranty carefully. Assembly and installation are the purchaser's responsibility and beyond ProRac's control. Therefore, ProRac exclusively limits its warranty to the repair or replacement of a defective ProRac product for up to three years from retail purchase. Warranty excludes damage to your vehicle, cargo, or any person or property during assembly, installation, and use.

- ◆ Do not carry more than 150 pounds (68KG) of combined cargo and accessories on ProRac crossbars. ProRac crossbars do not increase gutter or roof strength. ProRac cannot warranty loads that exceed this limit.
- ◆ Do not use ProRac crossbars and accessories for purposes other than those for which they were designed. Do not exceed their carrying capacity. Failure to follow these guidelines or the product instructions will void the warranty.
- ◆ Make sure all knobs, bolts, screws, straps, and locks are firmly attached, tightened, and locked before every trip. All fasteners must be periodically inspected for signs of wear, corrosion, and fatigue. Check your load at stops during long trips to ensure continued fastening security.
- ◆ Check all local and state laws governing projection of objects beyond the width and length of vehicle. Be aware of the width and height of your cargo since low-clearance branches, bridges, and parking garages can affect the load. Never drive with any lock, knob, or rack in an open or unlocked position. All long loads such as, but not limited to, sailboards, surfboards, kayaks, canoes, and lumber must be tied down front and rear to the bumpers or tow hooks of the vehicle.
- ◆ Remove your rack and accessories when they are not in use and before entering automatic car washes.
- ◆ All locks must be turned and moved periodically to ensure smooth operation. Use graphite or similar dry lubricant. Locks are designed to deter vandalism and theft. Remove valuable gear if your vehicle is unattended. Replacement keys are available only through your ProRac dealer.
- ◆ All cargo will affect the vehicle's driving behavior. For your safety, adapt your speed to the conditions of the road and load being carried. Obey all posted speed limits and traffic cautions.
- ◆ Due to their wind resistance, do not carry disks or wheels with covers on the ProRac bike carrier.
- ◆ Consult your ProRac dealer if you have questions regarding the operation and limits of ProRac products. Review all instructions and warranty information carefully.

© 2005 ProRac Systems, Inc.

RVWH020-IS
Revised 7-26-05

ProRac Systems Inc.
7109 31st Avenue North
Minneapolis, MN 55427-2848

Toll Free: 1-800-217-7133
Phone: 763-546-5620
Fax: 763-546-0933
WWW.PRORAC.COM